


USE THREE 4' X 3/4" ROUND SMOOTH STEEL DOWELS AT BOTH VALLEY GUTTER CONSTRUCTION JOINTS. ONE END OF EACH BAR SHALL BE GREASED.

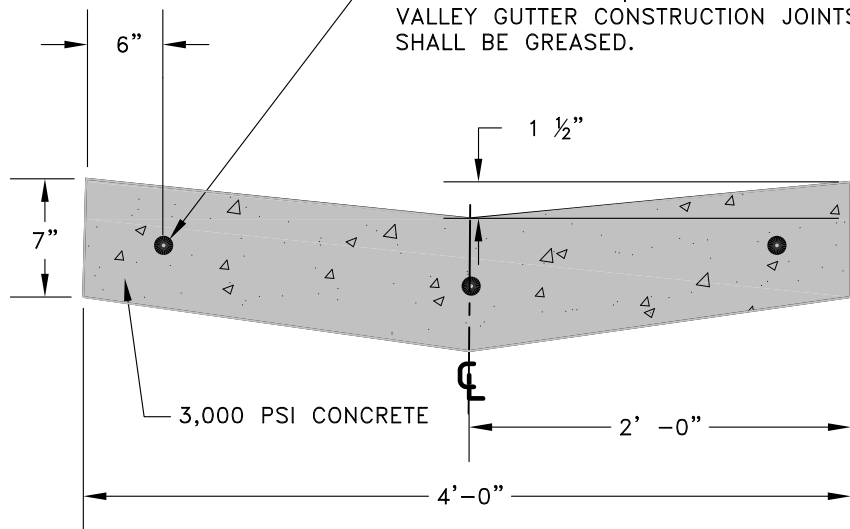

City of Lake Oswego  
Engineering Division

Erica Rooney, P.E. City Engineer

**VALLEY GUTTER DETAIL**

**S2-04**

EFFECTIVE DATE: JANUARY 1, 2018

NOT TO SCALE

DRAWING NUMBER