


- NOTES:**
- 1) CLEANOUT FRAME FLANGE TO BE BOLTED AND GROUTED IN PLACE.
 - 2) CAST IRON FRAME AND COVER SHALL BE IFCO NO.'S 241 FOR 6" AND 240 FOR 8" OR APPROVED EQUAL.

SECTION



PLAN

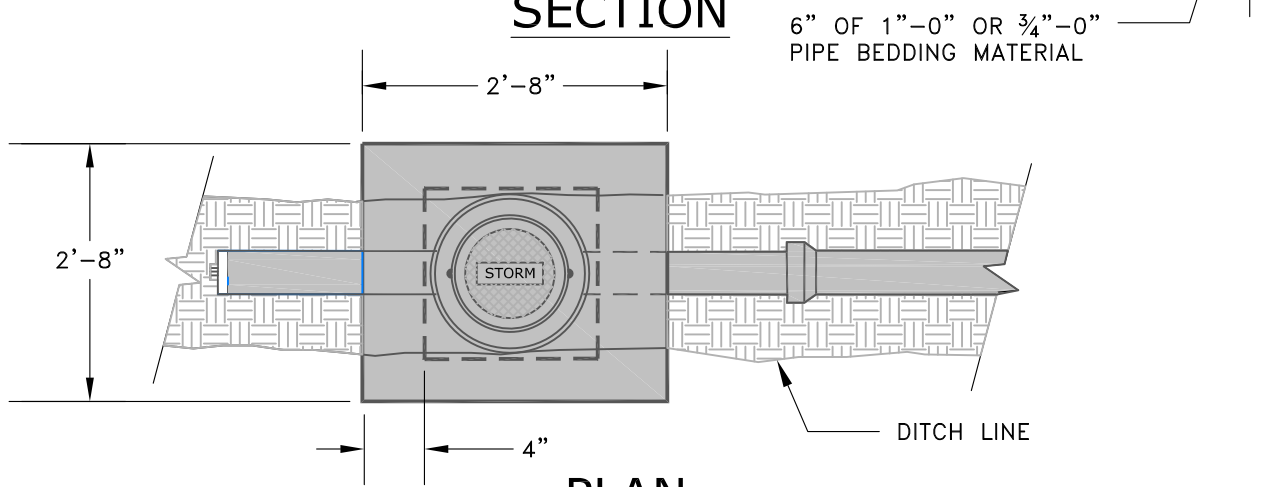

City of Lake Oswego
 Engineering Division
 Erica Rooney, P.E. City Engineer

**TYPICAL STORM
 SEWER CLEANOUT
 (TRAFFIC AREAS ONLY)**

SD4-01A