


# Lake Oswego Radio Communications - FRS-GMRS Channel/Tone Map General Reference Chart

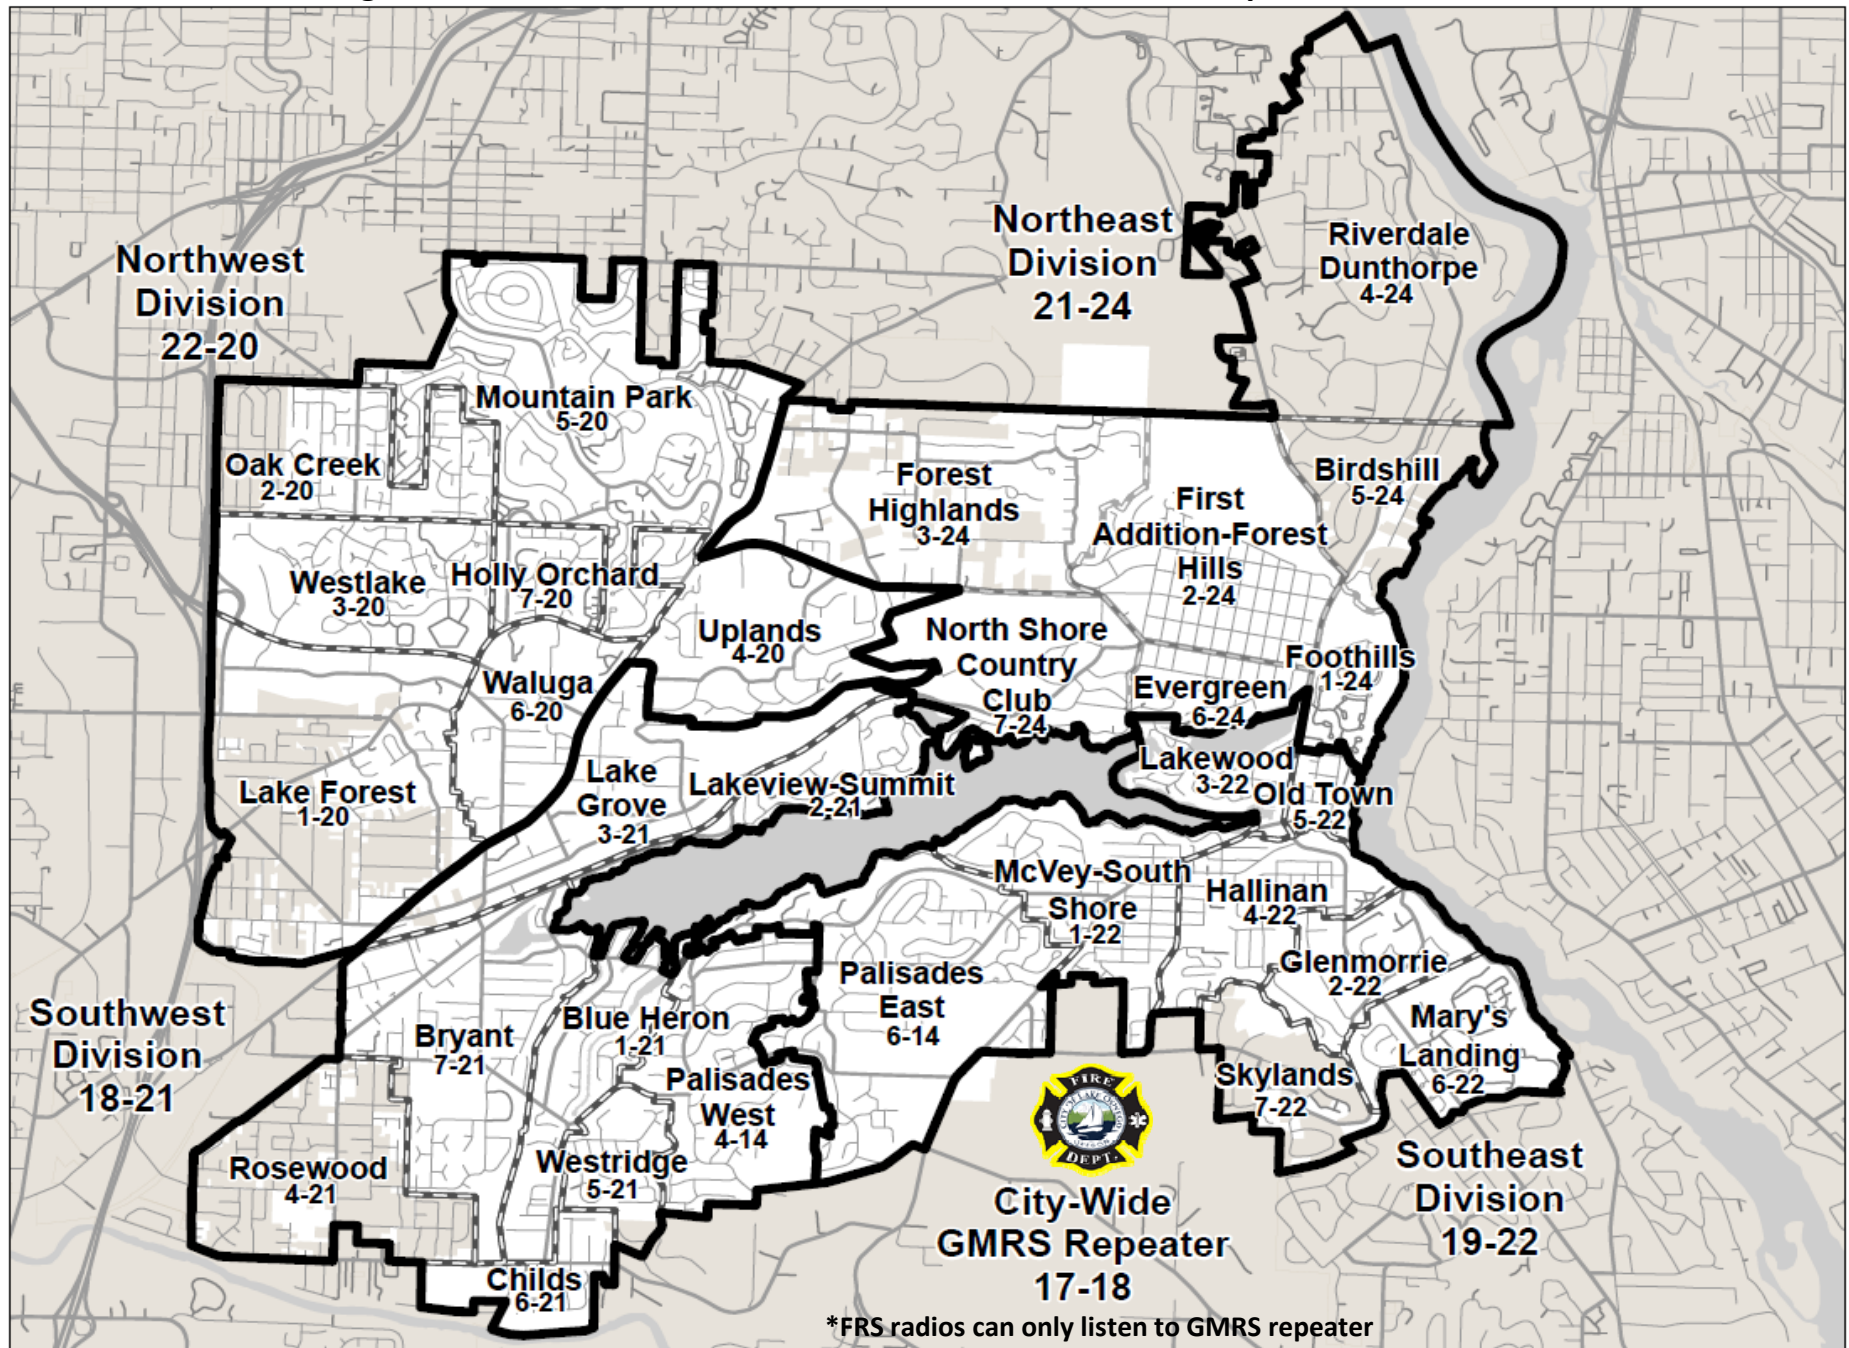

## Lake Oswego Radio Communications - FRS-GMRS Channel/Tone Map General Reference Chart

Channel	Frequency	FRS Maximum Power Output	GMRS Maximum Power Output
1	462.5625	2 W	5 W
2	462.5875	2 W	5 W
3	462.6125	2 W	5 W
4	462.6375	2 W	5 W
5	462.6625	2 W	5 W
6	462.6875	2 W	5 W
7	462.7125	2 W	5 W
8	467.5625	0.5 W	0.5 W
9	467.5875	0.5 W	0.5 W
10	467.6125	0.5 W	0.5 W
11	467.6375	0.5 W	0.5 W
12	467.6625	0.5 W	0.5 W
13	467.6875	0.5 W	0.5 W
14	467.7125	0.5 W	0.5 W
15	462.5500	2 W	50 W
16	462.5750	2 W	50 W
17	462.6000	2 W	50 W
18	462.6250	2 W	50 W
19	462.6500	2 W	50 W
20	462.6750	2 W	50 W
21	462.7000	2 W	50 W
22	462.7250	2 W	50 W
23, 15R, R1	467.5500		50 W
24, 16R, R2	467.5750		50 W
25, 17R, R3	467.6000		50 W
26, 18R, R4	467.6250		50 W
27, 19R, R5	467.6500		50 W
28, 20R, R6	467.6750		50 W
29, 21R, R7	467.7000		50 W
30, 22R, R8	467.7250		50 W

CTCSS Tone*	Common FRS Privacy Code	CTCSS Tone*	Common FRS Privacy Code
67.0 Hz	1	159.8 Hz	-
69.3 Hz	-	162.2 Hz	26
71.9 Hz	2	165.5 Hz	-
74.4 Hz	3	167.9 Hz	27
77.0 Hz	4	171.3 Hz	-
79.7 Hz	5	173.8 Hz	28
82.5 Hz	6	177.3 Hz	-
85.4 Hz	7	179.9 Hz	29
88.5 Hz	8	183.5 Hz	-
91.5 Hz	9	186.2 Hz	30
94.8 Hz	10	189.9 Hz	-
97.4 Hz	11	192.8 Hz	31
100.0 Hz	12	196.6 Hz	-
103.5 Hz	13	199.5 Hz	-
<b>107.2 Hz</b>	<b>14</b>	203.5 Hz	32
110.9 Hz	15	206.5 Hz	-
114.8 Hz	16	210.7 Hz	33
118.8 Hz	17	218.1 Hz	34
<b>123.0 Hz</b>	<b>18</b>	225.7 Hz	35
127.3 Hz	19	229.1 Hz	-
<b>131.8 Hz</b>	<b>20</b>	233.6 Hz	36
<b>136.5 Hz</b>	<b>21</b>	241.8 Hz	37
<b>141.3 Hz</b>	<b>22</b>	250.3 Hz	38
146.2 Hz	23	254.1 Hz	-
<b>151.4 Hz</b>	<b>24</b>	270.4 Hz	-
156.7 Hz	25		

\* Manufacturers such as BTECH, Radioddity, Wouxon and others may use additional tones beyond the common Motorola FRS radio list. Verify your specific radio with manufacturer information.

NOTE: Tones in BOLD font are used in the Lake Oswego Radio Plan.